

JVG SERIES

Ultra-High Purity
Vacuum Generators




■ PRODUCT FEATURES

- 170mbar(127.5 torr) vacuum generated with a minimum source nitrogen pressure of 60 psig.
- Stainless Steel 316L construction.
- Cleaned, welded, assembled, tested and packaged in a Class 10 clean room.
- Hot DI water cleaned.
- Surface Finish 5-20 μ in Ra.
- 100% Helium leak tested




■ Vacuum and Flow Specification

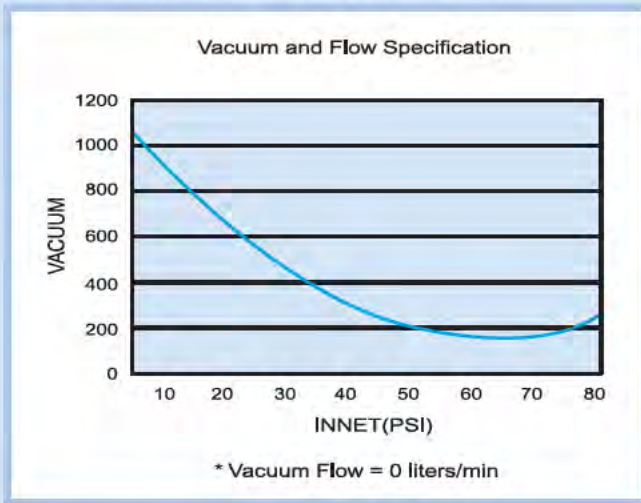

■ Ordering Number

	MATERIAL	SIZE	CONNECTION
S	SUS316 Single Melt	4 1/4"	VF VCR Female
V	SUS316L Double Melt	6 3/8"	VM VCR Male
		8 1/2"	TW But Weld

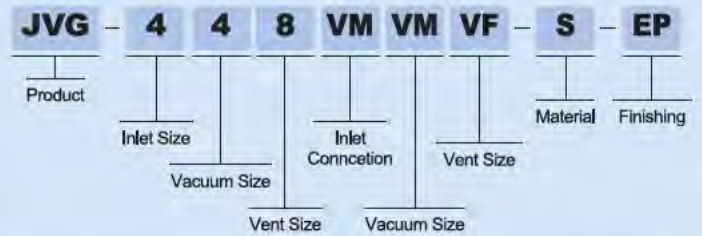

■ Dimensional & Ordering Information

MODEL	ORDERING NUMBER	A	B	C
	JVG-448VMVMVF-S-EP	23.3	40	34
	JVG-448VMVMVM-S-EP	23.3	29.5	34
	JVG-448VMVMTW-S-EP	23.3	33.5	34



Head Office