


**2PC INSTRUMENTATION BALL VALVE  
MAX. WORKING PRESSURE 1000PSIG (69Bar)  
WITH PTFE SEAT**

**Product Features**

- Compression fitting enables quick mounting and dismantling from the pipeline.
- 316 Stainless steel construction.
- Floating ball design.
- Micro finished ball provides a positive seal.
- Oil free treatment.
- Bi-directional flow (fully opened or fully closed)
- Straight through flow path for minimum pressure drop.
- Directional handle indicating on-off position.
- Allow for panel mounting.
- Low operating Torque.

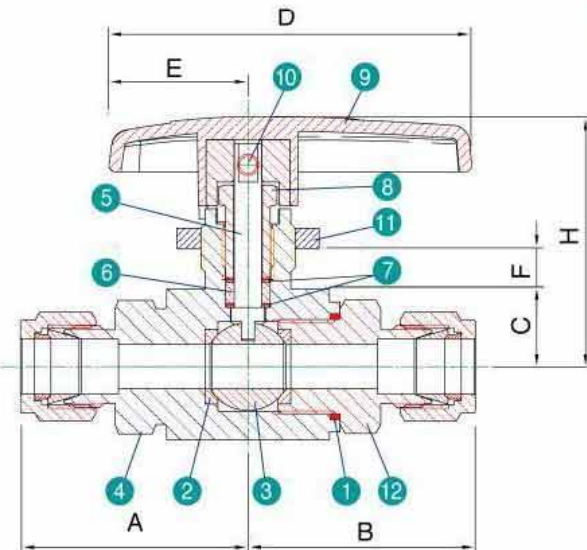


**Dimensions(mm)**

SIZE	Orifice	Cv	H	A	B	C	D	E	F
1/4"	4.6	0.93	32.5	34.2	34.2	8.8	50	19.2	3.3
3/8"	6.4	2.34	46.4	41.1	41.1	12	66	25.4	6.3
1/2"	10.3	6.42	58.4	53.1	53.1	18.2	84.7	32.5	9.6
3/4"	10.3	6.42	58.4	53.2	53.2	18.2	84.7	32.5	9.6

**Materials Of Construction**

NO.	PART NAME	MATERIAL	QTY
1	CONNECTER O-Ring	PTFE	1
2	SEAT	PTFE	2
3	BALL	316 Sainless Steel	1
4	BODY	ASTM A 351 Grade CF8M	1
5	STEM	ASTM A 276 TYPE 316	1
6	STEM SEAL	PTFE	1
7	STEM WASHER	316 Sainless Steel	2
8	PACKING NUT	ASTM A 276 TYPE 316	1
9	HANDLE	Glass Reinforced Nylon	1
10	HANDLE SET SCREW	Stainless Steel	1
11	PANEL NUT	ASTM A 351 Grade CF8M	1
12	END CONNECTOR	ASTM A 351 Grade CF8M	1

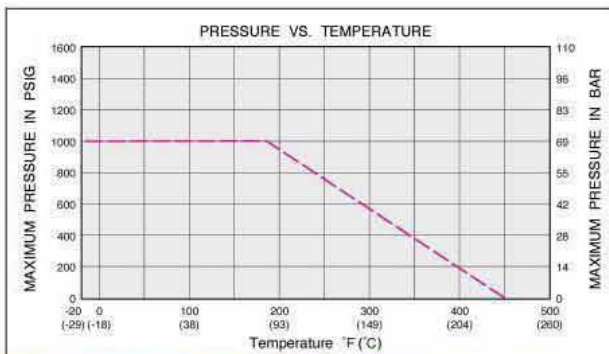

**OHNO BELLOWS  
IND.CO.,LTD.**

**Head Office:** 2-15-17, Yaguchi, Ota-ku, Tokyo, 146-0093, Japan  
TEL:81-03-3759-6671 FAX:81-03-3758-7551

**Factory :** 28, Hebinami, Shimofunao-cho, Joban, Iwaki-City  
Fukushima Prefecture 972-8312, Japan

Agent: